



Panamatic Top-Loading Sluicer Disinfectors



infection control



Introduction

When Panamatics were first launched, they broke new ground in washer disinfecter technology and set the standard for others to follow.

In recent times, Panamatics have been subtly redesigned to incorporate modern styling concepts and the latest technological advances. Craftsmanship and attention to detail are paramount producing refinements that are designed as much to increase performance as to please the eye.

With a broad range of Panamatics to choose from, you are sure to find at least one that suits your needs perfectly.

“Panamatics... a celebration of technology, style and performance!”



Core Values

From the Panamatic Mini right through to the Maxi Plus, all Panamatics share the same fundamental design principles.

In addition to this, our design team has made sure that all Panamatics are:

Simple to operate

Simply empty contents directly into the chamber, load utensils and close the lid. Press the start button and all other operations are undertaken fully automatically.

Absolutely Safe

Panamatics boast an array of features to ensure the highest standards of safety during operation.

Exceptionally Versatile

Panamatics allow you to wash and disinfect much more than just commode pots, bedpans and bottles.

Modern and Attractive

Panamatics will brighten up your sluiceroom with their ergonomic, modern styling. Their high-grade stainless steel construction is finished with an attractive polish specially developed to keep surfaces sparkling, spotless and germ free.

Economic

Panamatics make the most efficient use of power and water and help you keep operating costs to a minimum.

First and foremost, Panamatics **wash and disinfect thoroughly**. A combination of high pressure rotating wash nozzles and strategically sited spray jets ensure superior wash performance. **Thermal disinfection** complies with the very latest standards and guidelines, including HTM 2030.

Reliability too is central to Panamatic design. Through our long experience of manufacture we have been able to select those materials and components that are the most dependable and durable. Not surprisingly, our warranties are exceptional extending to a full two years.



Panomatic MINI

Designed for relatively low workload situations, the slimline Panomatic Mini remains exceptionally versatile.




Standard Features

- Automatic lid
- Drain blockage cut-out
- Digital temperature display
- Two year warranty

Quick Check

Round Commode & Lid	1
Oval Commode & Lid	1
Square Commode	1
Bed pan	1
Slipper pan	1
Urine bottle	2
Catheter jug	2
Wash bowl	1

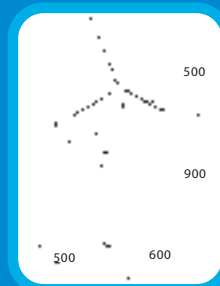


see pages 9 & 10 for accessories

Panamatic MIDI

Processing two pots and two bottles at a time, the Panamatic Midi will help you clear workloads quickly and effectively, saving time and cutting costs.

Standard Features

- Automatic lid
- Drain blockage cut-out
- Digital temperature display
- Two year warranty

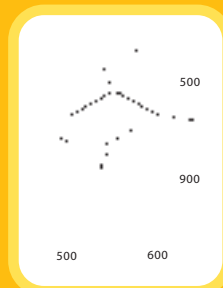

see pages 9 & 10 for accessories

Quick Check

Round Commode & Lid	2
Oval Commode & Lid	1
Square Commode	1
Bed pan	2
Slipper pan	1
Urine bottle	2
Catheter jug	2
Wash bowl	1
Bucket	1
Toilet seat raiser	1

Panomatic MAXI

In busy sluiceroom situations, the Panomatic Maxi excels. Its large wash chamber accommodates with ease three round or two square commode pots per cycle. This exceptional capacity is concealed within a surprisingly compact frame.




Standard Features

- Automatic lid
- Drain blockage cut-out
- Digital temperature display
- Two year warranty

Quick Check

Round Commode & Lid	3
Oval Commode & Lid	2
Square Commode	2
Bed pan	2
Slipper pan	2
Urine bottle	3
Catheter jug	3
Wash bowl	2
Bucket	1
Toilet seat raiser	1

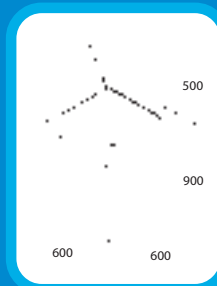


see pages 9 & 10 for accessories

Panomatic MAXI plus

This top of the range Panomatic combines the superior capacity and versatility of the Maxi with a number of other useful features. Its special rimflush facility is particularly useful for disposal functions such as emptying buckets or flower vases. Simply press the foot pedal with the lid open and contents emptied into the chamber are flushed away.

Standard Features

- Automatic lid
- Drain blockage cut-out
- Digital temperature display
- Rimflush action
- Cycle counter
- Two year warranty

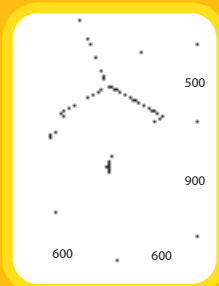

see pages 9 & 10 for accessories

Quick Check

Round Commode & Lid	3
Oval Commode & Lid	2
Square Commode	2
Bed pan	2
Slipper pan	2
Urine bottle	3
Catherter jug	3
Wash bowl	2
Bucket	1
Toilet seat raiser	1


A cycle counter has been included to enable you to monitor machine usage and performance more effectively.

COMBIS


Panomatic Combis

Panomatic Combis combine a Panomatic with a stainless steel sink unit complete with wrist lever taps, work surface and lockable storage cupboard.

Combi sink units are available in a choice of single or double door sizes and can be combined with any Panomatic in the range. The modular design adopted makes it possible to combine these units with other products in Dolphin's range, (including Incomatic macerators and Hygenex disposal hoppers) to give a neat and entirely uniform appearance to your sluiceroom.

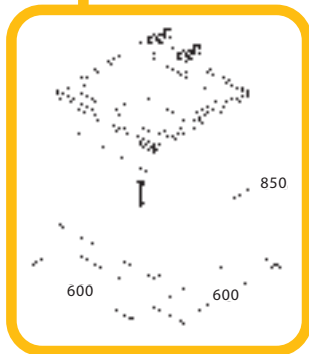

“Panomatic Combis... the complete sluiceroom solution”

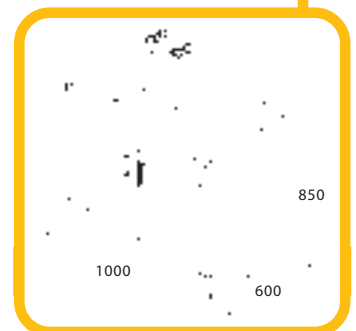

Accessories

1 Integral Venting Condenser

This component plays a vital safety role in allowing steam to condense during the disinfection process. For Panamatics which stand against an internal wall, you will almost certainly need one of these. Where however you can site your Panamatic against an external wall, you may be able to vent directly through the wall to atmosphere.

2 Scalematic Scale Inhibitor

In hard water areas, limescale can be a problem, clogging wash nozzles, reducing the efficiency of steam generation and even causing premature failure of components. We recommend you protect your Panamatic with a Scalematic scale inhibitor. This clever device releases into the water harmless foodgrade chemicals which coat surfaces with a thin film and prevent scale from forming. The system is fully automatic and cartridges are replaced at approximately 6 month intervals as part of our standard servicing programme.

3 Detergent System

Adding a little detergent to the wash can help reduce staining caused by medication. The detergent system comprises:

- A pump for injecting detergent into the wash
- An initial supply of low-foaming DDC Eco Wash
- A choice of wall-mounted lockable basket or steel cabinet for storing your detergent safely. Opting for the steel cabinet gives you the added benefit of storage space for reagents.



1



2



3



4



4

Accessories

Multipurpose Utensil Rack

A special wash chamber rack is available for processing small items such as kidney bowls, sputum bowls and other similar articles.

5



5

Stainless Steel Wall Racks

Wall racks allow utensils to be conveniently stored before being returned to residents' rooms. Constructed of polished stainless steel, this wall rack holds 5 bedpans or commode pots (including the large square ones) and up to 7 bottles or jugs. It comes with a removable stainless steel drip tray and measures 630mm H x 835mm W x 390mm D.

6



6

Installation Kit

A kit consisting of selected plumbing and electrical materials is available to facilitate installation.

TECH

Technical Information

Installation

You can arrange installation yourself, or if you prefer, we will install the equipment for you.

Electrical supply	single phase, 240V / 50Hz, 13amp fused neon isolating switch
Water supply	15mm (½") cold water supply, minimum flow 5 litres / minute, minimum pressure 15psi. Panamatics incorporate a type A air gap and are suitable for direct connection to the mains water supply.
Overflow	22mm gravity fall
Soil connection	82mm (3") P or S trap connecting to a 110mm (4") soil pipe. Drain connection can be made to the rear, left or right hand side or through the floor. Special drain cut-outs have been provided for this purpose.
Combi models	require in addition hot and cold water supply to sink and a 40mm (1½") sink waste connection.

Performance

Cycle time	approximately 5 minutes
Electrical Con.	0.15kW per cycle
Water Con.	15-25 litres per cycle (adjustable)
Disinfection	a minimum of 80°C for one minute as required by all current British Standards (adjustable should Standards change in the future)

All services are accessible from the front allowing other appliances to be sited on either side. Full instructions are available in a dedicated installation booklet. Site surveys can be carried out throughout the UK.

After Sales Service

Once your Panamatic has been installed, our service engineers will call to commission and ensure that each machine conforms to the exacting standards demanded by our quality systems. We will train your staff how to use your Panamatic and look after it properly. During the 2 year warranty, technical support is provided by our own specialist and highly skilled engineers. At the end of the warranty period, we offer you a choice of service contracts to keep your Panamatic working at its best.

Warranties

Two year parts & labour warranty - terms and conditions apply.

Product Range

- Panamatic Top-Loading Sluicer Disinfectors
- Panamatic Front-Loading Washer Disinfectors
- Hygenex Stainless Steel Sanitaryware
- Incomatic Pad Macerators
- Disposable Bedpan Macerators
- Ancillary Sluiceroom Equipment
- Sluice Servicing



DDC Dolphin
The Fulcrum
Vantage Way
Poole, BH12 4NU

Telephone: +44 (0) 1202 731555
Facsimile: +44 (0) 1202 731666
Email: sales@sluice.co.uk
Web: www.sluice.co.uk



Certificate No: 1161/96